

HL-XT SERIES / PRODUCT OVERVIEW

HL-XT Glass-Face


Architectural LED linear lights

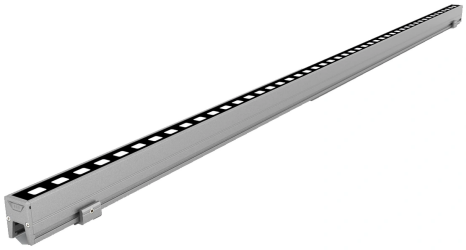


HL-XT-2230-BL Square

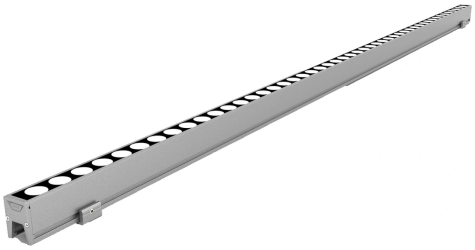

HL-XT-2230-BL Round

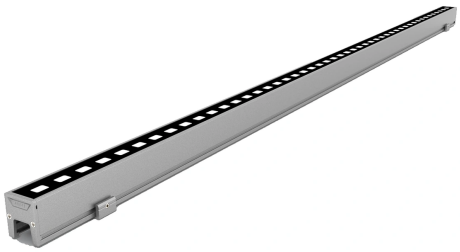

HL-XT-2832-BL Square

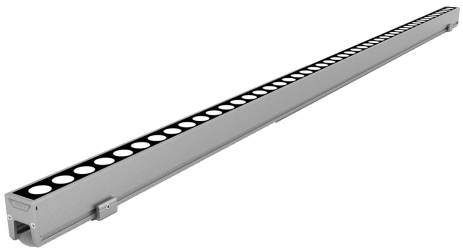

HL-XT-2832-BL Round

MODEL COMPARISON

Model	Luminaire (W × H × L)	Installed height	Kit weight
HL-XT-2230-BL Square	W22 × H30 × L1000 mm	32 / 56 mm	0.98 kg
HL-XT-2230-BL Round	W22 × H30 × L1000 mm	32 / 56 mm	0.98 kg
HL-XT-2832-BL Square	W28 × H32 × L1000 mm	34 / 58 mm	1.13 kg
HL-XT-2832-BL Round	W28 × H32 × L1000 mm	34 / 58 mm	1.13 kg

Installed height varies with the mounting option.

HL-XT SERIES / TECHNICAL DATA

Technical specifications

HL-XT Glass-Face

Parameter	Specification
Power options	12 W / 15 W
Input voltage	24 V DC
Luminous efficacy	66 lm/W
Nominal beam angle	120°
Light color	White / RGB / RGBW
White CCT	2000-6500 K (custom options)
Control options	DMX512 / On/off
Ingress protection	IP65
Impact resistance	IK10
Operating temperature	-50 °C to 60 °C
Housing material	6063 aluminum alloy
Optical cover	HL-XT-2230-BL 3 mm silk-screen-printed glass HL-XT-2832-BL 4 mm silk-screen-printed glass
Mounting options	Aluminum flat clips / stainless-steel spring clips / rotating brackets
Warranty	5 years

Mounting clip spacing is adjustable.


HL-XT SERIES / MECHANICAL DATA

Dimensions & mounting

HL-XT Glass-Face


HL-XT-2230-BL Square

INSTALLED HEIGHT **Clip mount 32 mm** **Rotating bracket 56 mm**

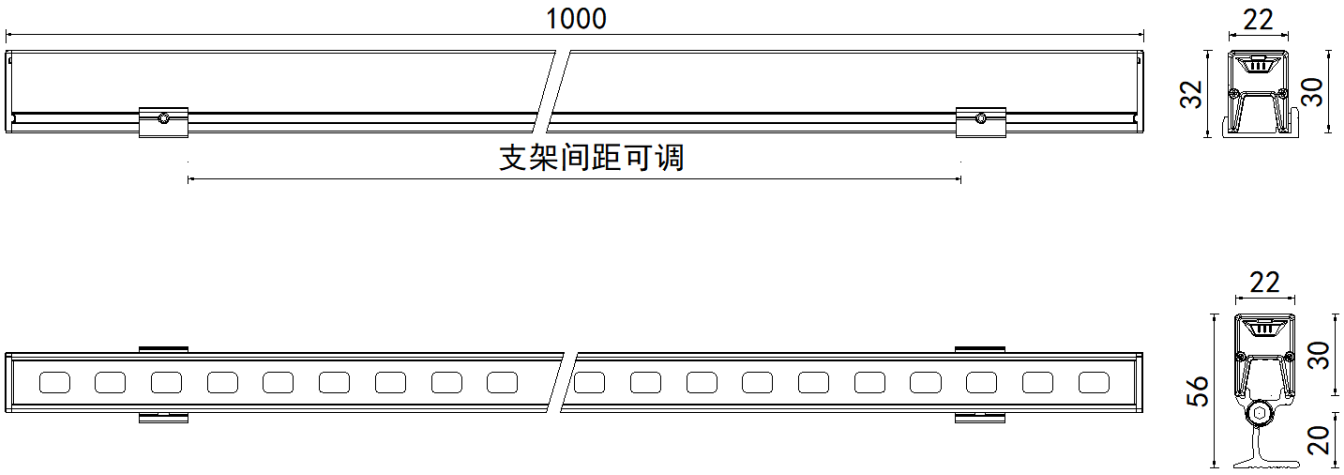

HL-XT-2230-BL Round

INSTALLED HEIGHT **Clip mount 32 mm** **Rotating bracket 56 mm**

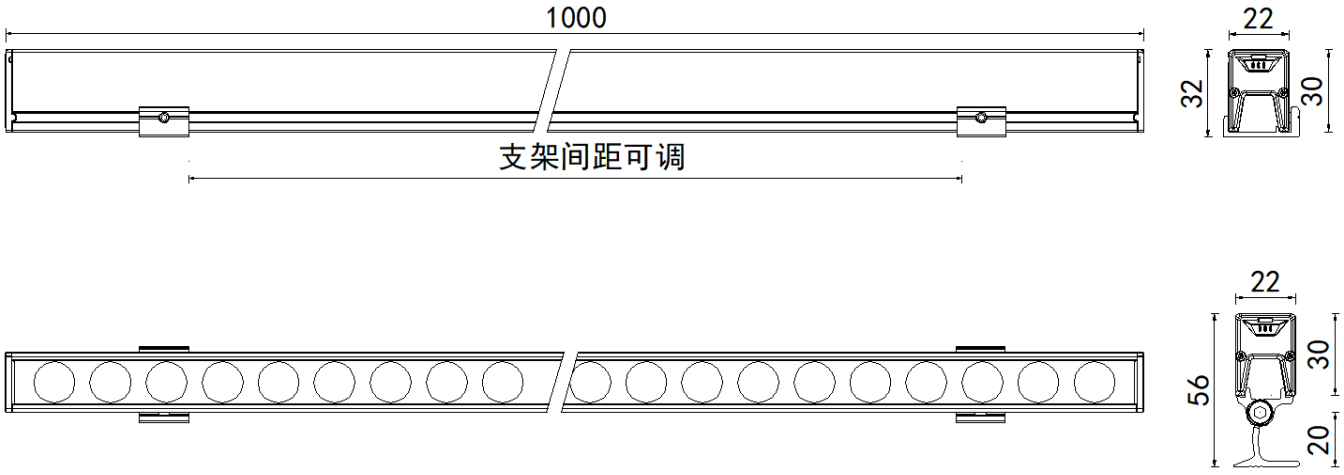


HL-XT SERIES / MECHANICAL DATA

Dimensions & mounting

HL-XT Glass-Face

HL-XT-2832-BL Square

INSTALLED HEIGHT **Clip mount 34 mm** **Rotating bracket 58 mm**

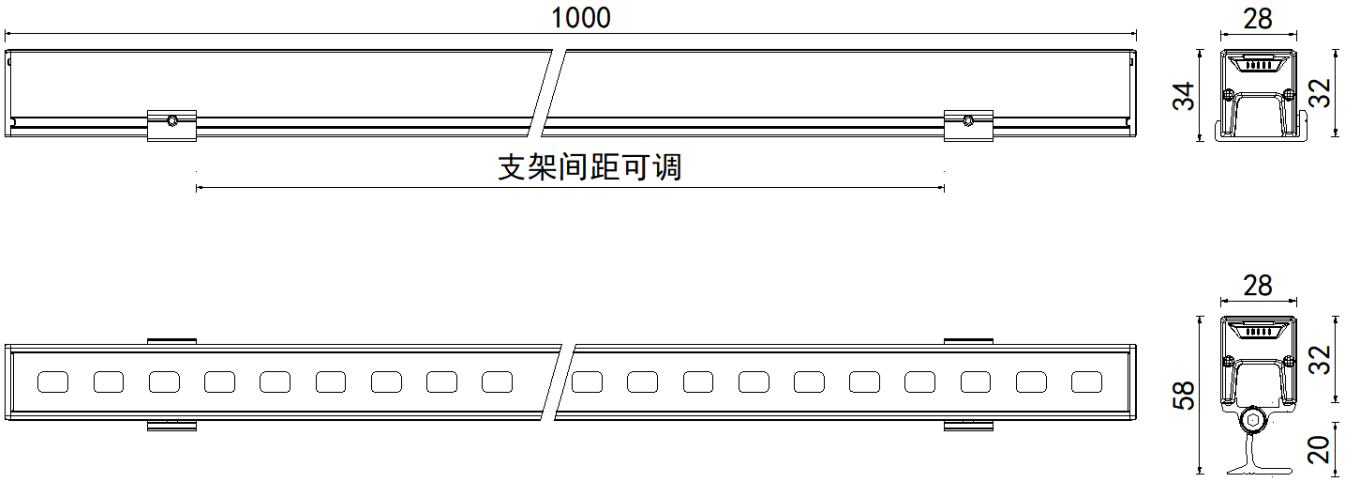

HL-XT-2832-BL Round

INSTALLED HEIGHT **Clip mount 34 mm** **Rotating bracket 58 mm**

