

HL-XT SERIES / PRODUCT OVERVIEW

# HL-XT KP Baffled


Architectural LED linear lights

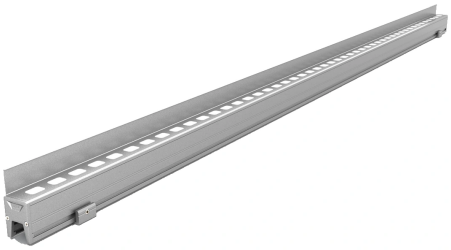


**HL-XT-2230-KP Square With Baffle**

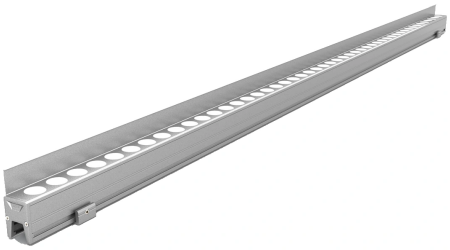

**HL-XT-2230-KP Round With Baffle**

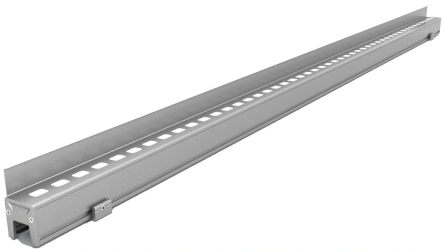

**HL-XT-2830-KP Square With Baffle**

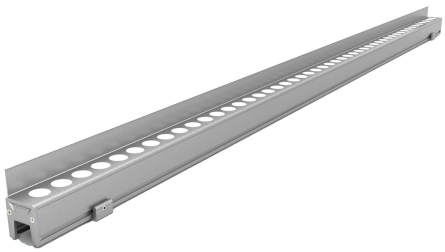

**HL-XT-2830-KP Round With Baffle**

## MODEL COMPARISON

| Model | Luminaire (W × H × L) | Installed height | Kit weight | Power |
|---|---|---|---|---|
| HL-XT-2230-KP Square With Baffle | W22 × H48 × L1000 mm | 50 / 74 mm | 0.91 kg | 12 W / 15 W |
| HL-XT-2230-KP Round With Baffle | W22 × H48 × L1000 mm | 50 / 74 mm | 0.91 kg | 12-15 W Compatible range |
| HL-XT-2830-KP Square With Baffle | W28 × H50 × L1000 mm | 52 / 76 mm | 0.96 kg | 12 W / 15 W |
| HL-XT-2830-KP Round With Baffle | W28 × H50 × L1000 mm | 52 / 76 mm | 0.96 kg | 12 W / 15 W |

Luminaire height includes the baffle. Installed height varies with the mounting option.

HL-XT SERIES / TECHNICAL DATA

# Technical specifications

HL-XT KP Baffled

| Parameter | Specification |
|---|---|
| Input voltage | 24 V DC |
| Luminous efficacy | 66 lm/W |
| Nominal beam angle | 120° |
| Light color | White / RGB / RGBW |
| White CCT | 2000-6500 K (custom options) |
| Control options | DMX512 / On/off |
| Ingress protection | IP65 |
| Impact resistance | IK10 |
| Operating temperature | -50 °C to 60 °C |
| Housing material | 6063 aluminum |
| Profile construction | Aluminum aperture profile with a raised side baffle |
| Mounting options | Aluminum flat clips / stainless-steel spring clips / rotating brackets |
| Warranty | 5 years |

Mounting clip spacing is adjustable.

HL-XT SERIES / MECHANICAL DATA


# Dimensions & mounting

HL-XT KP Baffled

## HL-XT-2230-KP Square With Baffle

**INSTALLED HEIGHT** **Clip mount 50 mm** **Rotating bracket 74 mm**


Baffle extension 18 mm

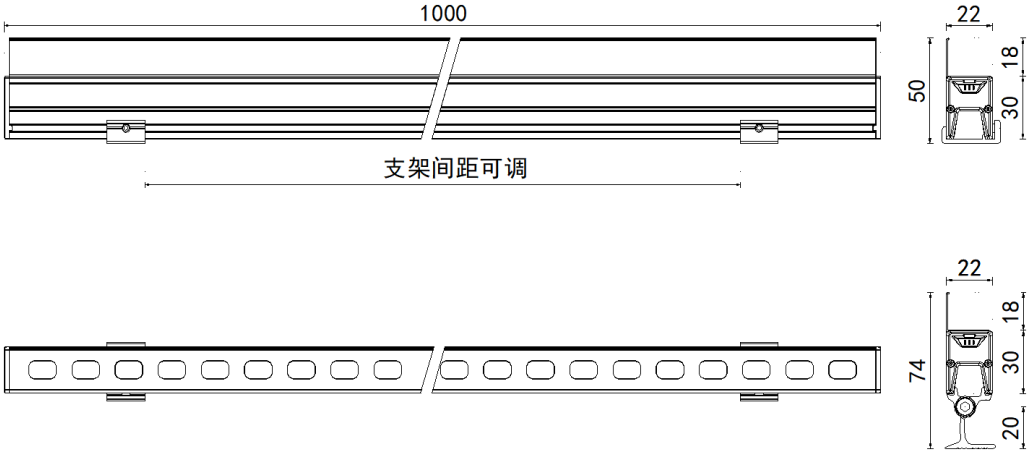


## HL-XT-2230-KP Round With Baffle

**INSTALLED HEIGHT** **Clip mount 50 mm** **Rotating bracket 74 mm**

Baffle extension 18 mm

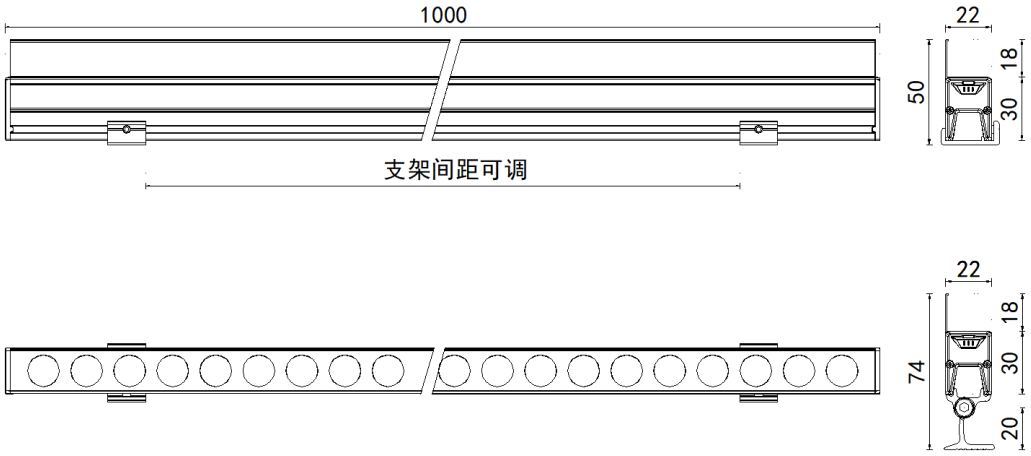

HL-XT SERIES / MECHANICAL DATA


# Dimensions & mounting

HL-XT KP Baffled

## HL-XT-2830-KP Square With Baffle

**INSTALLED HEIGHT** **Clip mount 52 mm** **Rotating bracket 76 mm**

Baffle extension 20 mm

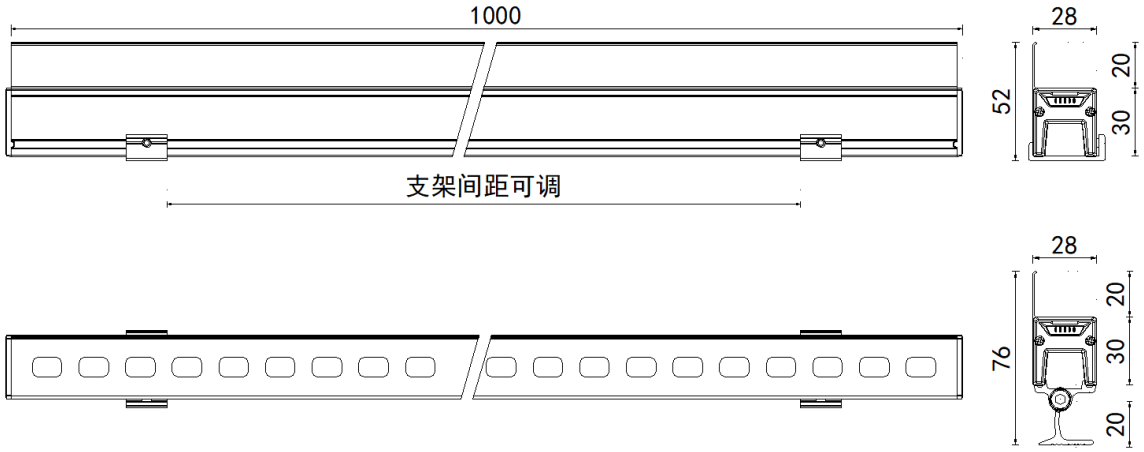


## HL-XT-2830-KP Round With Baffle

**INSTALLED HEIGHT** **Clip mount 52 mm** **Rotating bracket 76 mm**

Baffle extension 20 mm

